


# Inspired Wall Paper Install Instructions

To make your installation process as smooth as possible and ensure a quality application, please have the following tools handy prior to installing:

- Tape Measure
- Straight Edge/Metal Ruler
- Stanley Knife
- Viponds Self Adhesive Prep Coat (48hrs prior if required)
- Ladder/Step Ladder
- Applicator Squeegee (supplied)
- Fine Sandpaper (if required)

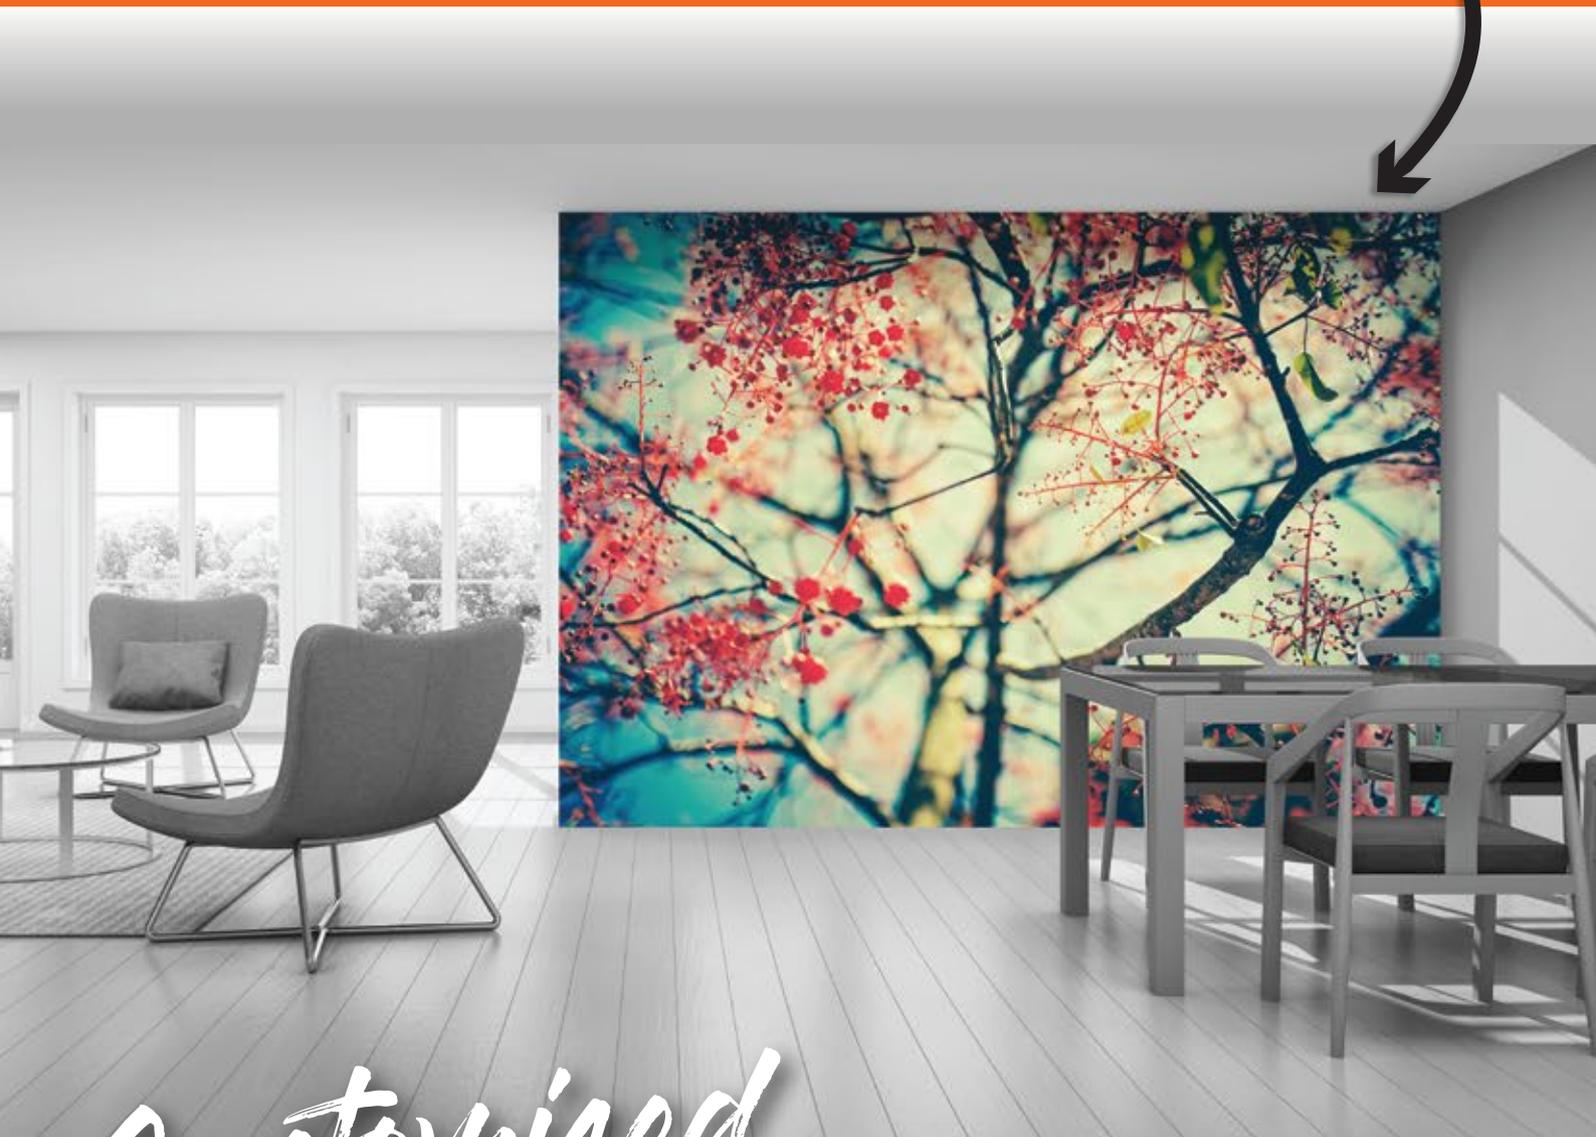

## Customised

wall graphics for your home or office



Salisbury  
**Signarama**  
The way to grow your business

# BEFORE YOU BEGIN >

## SURFACE PREPARATION


Inspect your walls for any defects such as cracks, peeling paint or bumps and repair as required to ensure a smooth surface. Remove any obstacles such as picture hooks, light switch plates/surrounds etc.

Using the sample supplied, apply to the wall to ensure the wallpaper will adhere. The sample should stick to the surface with reasonable tack whilst still being able to be peeled off without damage to the wall. If you are unsure, leave the sample applied to the wall overnight and check that it's still applied and not bubbling in the morning. If the sample does not feel like it is sticking to the wall or the sample edges peels off the wall overnight we suggest undercoating the wall in Viponds Self-Adhesive Prep Coat. Prep Coat should be left for 48hrs before applying graphics.

Further info about this undercoat is available at [www.viponds.com.au](http://www.viponds.com.au) or you can contact our helpful team on 08 283 3692 or [inspired@signssa.com.au](mailto:inspired@signssa.com.au).

### Installers Tip

*The smoother and cleaner the wall the better-finished product you will have!*




## STEP 1: Prepare Your Drops For Installation

Start from the left hand side of the wall with the wallpaper drop indicated as "No.1" and then sequentially as per your labelled wallpaper panels.

### Installers Tip:

*Unroll all of your drops and put in order so there is no confusion on what drop goes where.*

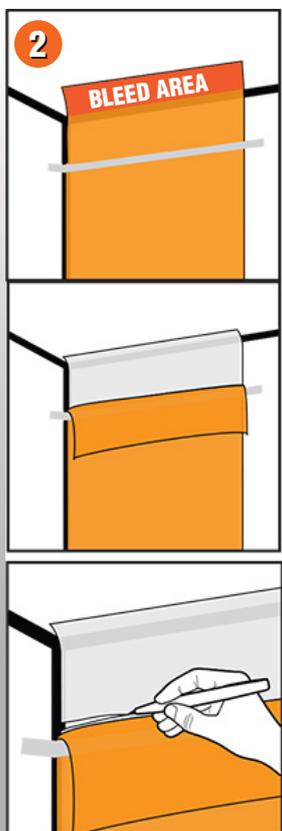

## STEP 2: Position Drop 1

Starting with drop 1, line up the left edge with the vertical line of your wall. Line up the top edge with your ceiling, allowing for the additional 50mm bleed along the top which can be trimmed off at the end of the installation. Allow the rest of the drop to unravel, ensuring it is straight and square to the wall.

*Note: 'Bleed' is additional vinyl which has been printed to allow for uneven walls or any discrepancies in your measurements. Each 'drop' has 50mm of bleed on the top and bottom.*

Place masking tape across drop 1 approx 100mm down the drop, securing it in place.

Peel the wallpaper away from the backing paper and cut the backing paper off with a Stanley knife.

### Installers Tip:

*Take your time lining up drop 1 as if this is applied straight, it will make the rest of your installation much easier!*




### STEP 3: Apply Drop No.1

Lightly tack the exposed section of the wallpaper to the top of your wall. As it is only lightly tacked, you can reposition the drop as required. If you are butting the wallpaper into another wall use the vertical left hand edge as your square edge. When you are happy with the position of drop 1, apply it securely onto your wall with the provided application squeegee using the felt edge side only.

#### **Installers Tip:**

*Only use the felt edge side of the application squeegee to ensure the prints are not scratched or damaged in anyway.*

---



### STEP 4: Complete Application Of Drop No.1

Slowly and evenly pull down the backing sheet in small sections (approx. 300mm at a time). Working in a left to right motion with your squeegee, apply the wallpaper film to the wall. As you work down the wall, continue peeling back the backing sheet to expose the adhesive side of the film. Keep applying the film in a left to right motion keeping the squeegee edge flat to the wall. Apply using reasonably firm pressure to ensure any bubbles can be pushed out.

#### **Installers Tip:**

*Use your 2nd installer to ensure the bottom of the drop stays straight as you apply the wallpaper film to the wall.*

---




### STEP 5: Wrinkles & Bubbles

If there are wrinkles or bubbles in your print at the end of the application of drop no.1 smooth out using your squeegee or peel back the film and re-apply the affected area. Avoid using too much pressure as you may damage or permanently crease the film.

#### **Installers Tip:**

*If you can't find any bubbles, try shining a torch on the surface to locate any hiding bubbles/wrinkles.*


---



### STEP 6: Mark your 10mm Overlap Line

As all vertical drops have a 10mm overlap, you will need to mark this on your wallpaper prior to installing your next drop. Using a measuring tape, measure 10mm in from the right hand edge of the wallpaper drop already on your wall.

We recommend placing a small piece of masking tape in 2-3 points down your wall which will act as your vertical line when applying your next drop.



### STEP 7: Apply Additional Drops

Once you have marked your bleed line, repeat steps 2 to 6 until all drops have been applied to the wall. The final drop will have 100mm bleed on the right edge.

IMPORTANT!

Align the drop at the top of the wall whilst your 2nd installer helps you align at the base.

#### **Installers Tip:**

*Keep a sharp eye on the top middle and bottom ensuring the prints line up as best possible before applying the entire drop*



### STEP 8: Trimming

Once all your drops have been applied to the wall, use a sharp blade/knife to remove any excess print on the top/bottom or sides of the wall.

#### **Installers Tip:**

*Make sure your knife/blade is sharp and use a new blade to ensure a clean trim line. If you are unsure about trimming a straight line try using a long edge ruler.*

### STEP 9: Enjoy Your Customised Wall Paper!



## ***Some additional tips and tricks for trimming around Switch Plates and Power Points***

- Remove switch plate covers
- Using your supplied application squeegee smooth the wallpaper film and crease into the top of the edge of the power-point surround
- Carefully trim the excess wallpaper around the power point.
- Make an incision using a sharp blade in the center of the power point
- Carefully extend the incision to the inside corner of each switch
- Using firm pressure with your squeegee seal the wallpaper around the edges of the power point